


Wideband 8in4out Combiner (800-2700Mhz)

Model : PW-8007-8008

- 1、 Part Number: PW-8007-8008
- 2、 Name: 8in8out Wideband Combiner

Frequency. Range (MHz)	800-2700
Transmission loss (dB)	11 ± 1dB
Return loss (dB)	≥18
Isolation (dB)	≥20
Impedance (ohms)	50
Power (Watt)	100
Working Temperature (°C)	-30 to +45
Connector	N-female
Number of Input / Output	8input / 8output
Dimension	410 x 302 x 15.5cm
Humidity	5% to 95%
Weight (Preliminary)	10 kg
Environment Class	Indoor - IP55

3、 Combiner Outline :

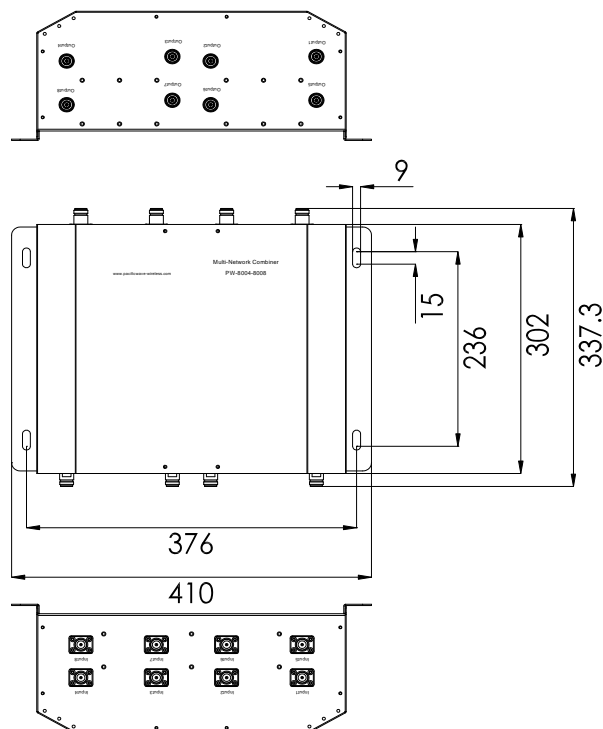

NOTE : Combiner is suitable to combine signal from same Frequency Range (i.e DCS1800Mhz with DCS1800Mhz or WCDMA2100mhz with WCDMA2100mhz). In case of combining various Frequency Range, additional Combiner with Filter is needed to provide higher isolation.

Wideband 8in4out Combiner (800-2500Mhz)

Model : PW-8004-8004

- 1、 Part Number : PW-8004-8004
- 2、 Name : 8in4out Wideband Combiner

Frequency. Range (MHz)	800-2500
Transmission loss (dB)	10 ± 1.5dB
Return loss (dB)	≥18 Adjacent ports ≥30 Non-Adjacent ports
Isolation (dB)	≥20
Impedance (ohms)	50
Power (W)	100
Temp. (°C)	-30~+70
Connector	N-female
Number of Input / Output	8input / 4output
Dimension (Preliminary)	70 x 25 x 15.5cm
Weight (Preliminary)	8.5 kg

3. Combiner Picture :

