

---

# TM-MCPA

*For Cost Effective  
Coverage Extension or Capacity Upgrade*



**August, 2006**

Product Enquiry & Local support contact [sales@pacificwave-wireless.com](mailto:sales@pacificwave-wireless.com)  
Another related component can be found at [www.pacificwave-wireless.com](http://www.pacificwave-wireless.com)


---



# Contents

- TM-MCPA Overview**
- Electrical Specifications**
- Mechanical Overview**
- Application - 2 Carriers BTS**
- Application - 4 Carriers BTS**
- Application - 8 Carrier BTS**
- NMS Features**

# TM-MCPA Overview

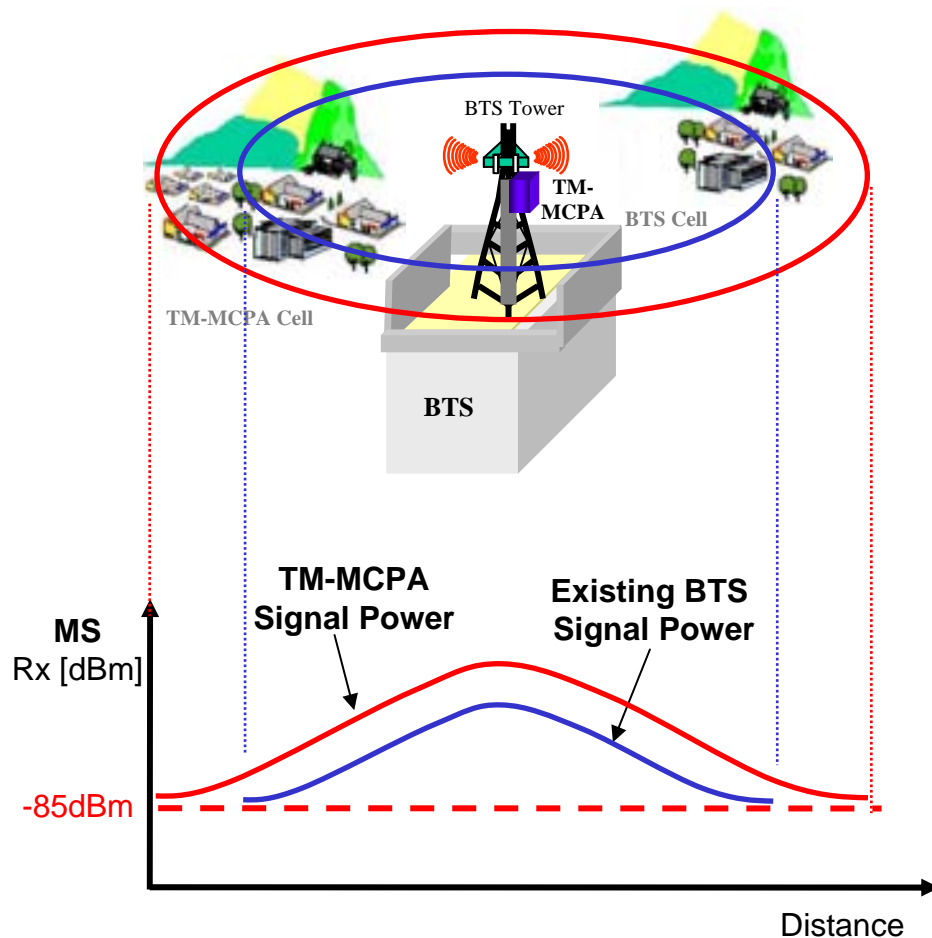

Due to rapid changes in wireless network environment, network operators are now faced with various infrastructure solutions and cost issues in upgrading wireless network. HFR's MCPA product line (Tower-Mounted and Ground-Mounted) provides cost effective network coverage extension and capacity upgrade solution. Apart from obvious coverage extension, sharing of existing RF cable and antenna when introducing new service channel for capacity or service upgrade is the major advantage of this system.

## TM GSM/GPRS/EDGE MCPA – Advantages

- Increase channel count per antenna while maintaining power level per channel
- Increases coverage area for new cell designs
- Avoid coverage reduction when increasing number of channels in existing systems
- Tower-Mount Feature to maximize output power at the Antenna

## TM GSM/GPRS/EDGE MCPA - Management

TM-MCPA can be easily monitored and controlled using built-in microprocessor. Following extensive features are included for managing system easily.

- User selectable downlink/uplink RF gain
- Parameter monitoring and alarm reporting
- Easy setup & maintenance feature



# Electrical Specifications

Parameters		Unit	Specifications	Remarks
Frequency Range	Forward	MHz	935 ~ 960	
	Reverse	MHz	890 ~ 915	
Number of Carriers		Channel	1~8 Channels	GSM and EDGE System
Maximum Output Power	Forward	dBm	50dBm (100W) / Total	6 Carrier = 42 dBm / Carrier
	Reverse	dBm	-10 dBm (0.1mW) / Total	
Gain	Forward	dB	20 ± 1	
	Reverse	dB	12 ± 1	Reverse Diversity: 12 dB (± 1dB)
Gain Control Range / Step	Forward	dB	25 / 0.5	
	Reverse	dB	15 / 1.0	
Noise Figure		dB	< 2.5	
Bypass Insertion Loss		dB	< 1.5	At Fail Safe Operation Mode
Cut-off Frequency	Tx - Rx	dBc	> 70	
	Rx - Tx	dBc	> 70	
Intermodulation (IMD)	Forward	dBc	< - 60 (typical)	At 2 Carrier, Max. Output Power
Maximum Tx Input Power without Damage		dBm	+46	
Normal Input Power Range for Rx		dBm	-105 ~ -55	
Gain Flatness	Forward / Reverse	dB	< 1.0	Peak to Peak
Fail Safe Operation	Forward / Reverse		RF Bypass	
Power Supply		VAC	220V± 20%	Instead -48VDC
NMS			SMS Modem	Include External Alarm



# Mechanical Overview



TM – MCPA Picture

Parameters	Specifications	Remarks
Environment Application	IP 55	Water proof Type
In/Out RF Connectors	DIN Type Female	
Coupling Port	SMA Type Female	Input / Output
External Alarm Port	D-SUB 9pin (Female)	
Dimension (W x D x H)	370 x 690 x 422 mm	
Weight	53 Kg	
Mounting Type	Wall or Tower Mount	
Operating Temperature	-20 ~ +50 °C	
Storage Temperature	-30 ~ + 80 °C	
Operating Humidity	5 ~ 90 %	Non- Condensing
Storage Humidity	0 ~95 %	Non - Condensing




# Application - 2 Carrier BTS

## Service Configuration without TM-MCPA

- ### Benefits
- ❖ Tx Power : 40 dBm  $\Rightarrow$  47 dBm / Carrier
  - ❖ BTS Sensitivity : -108 dBm  $\Rightarrow$  -111 dBm

## Service Configuration with TM-MCPA

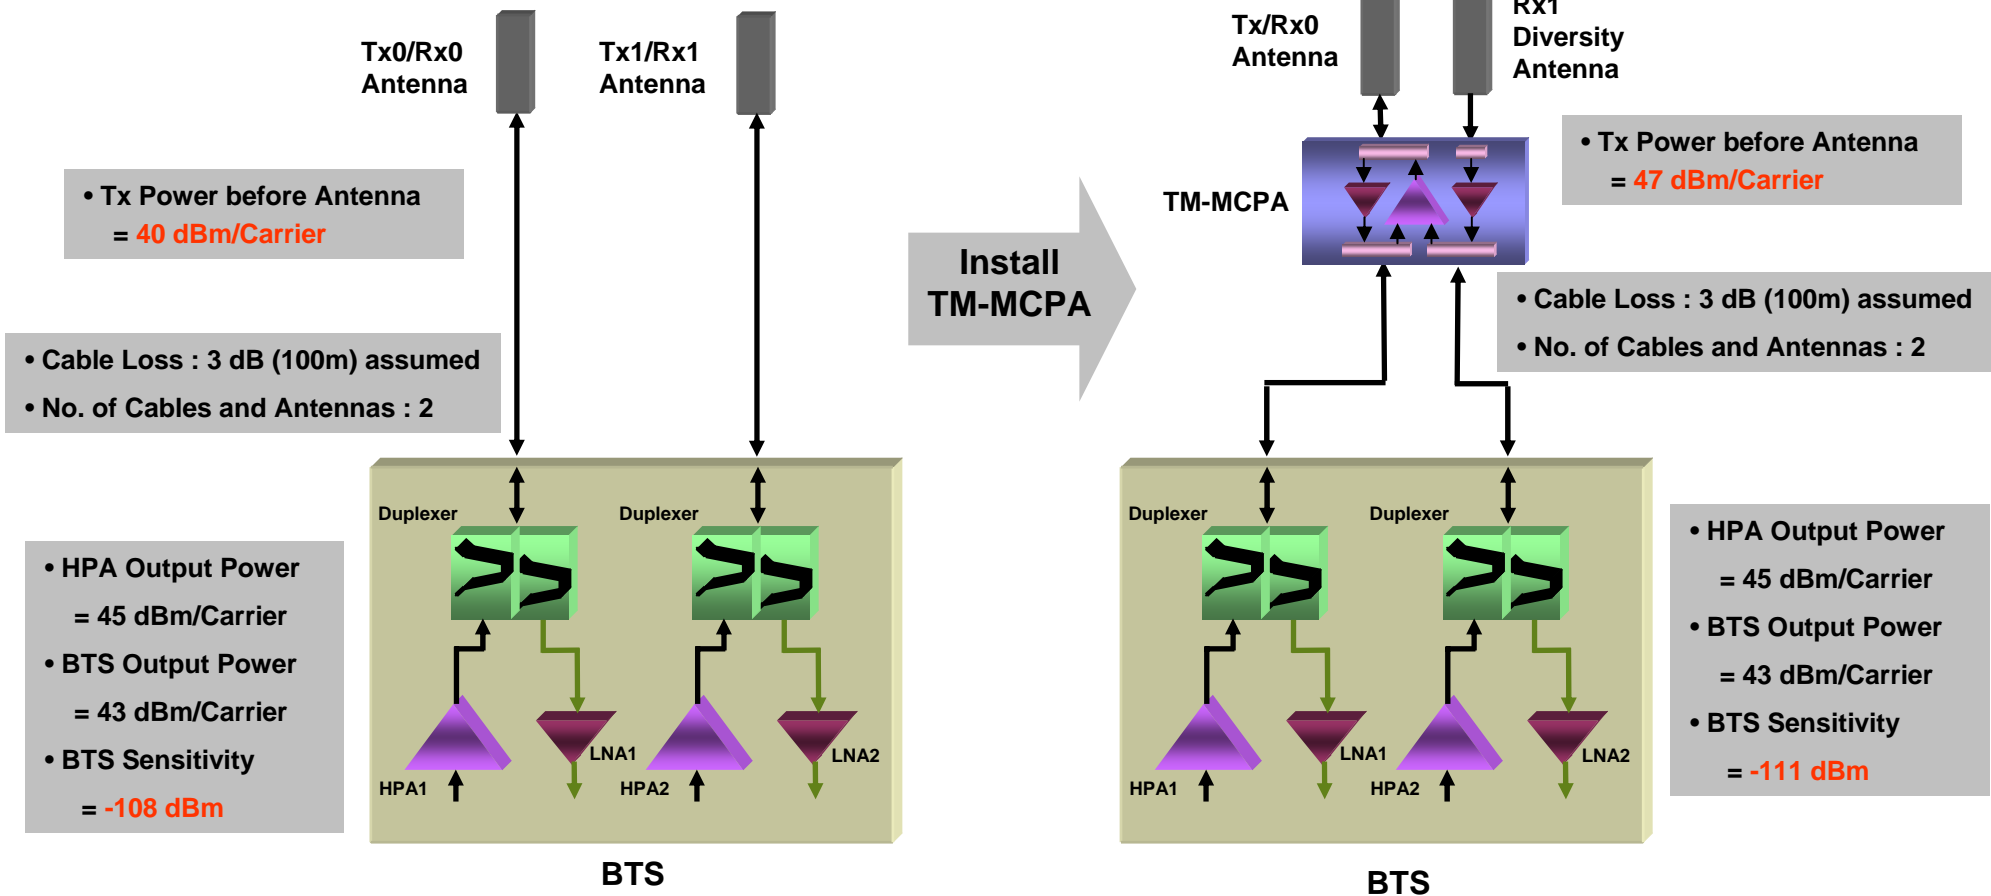




# Application - 4 Carrier BTS (Case 1)

## Service Configuration without TM-MCPA

- Tx Power before Antenna = 40 dBm/Carrier
- Cable Loss : 3 dB (100m) assumed
- No. of Cables and Antennas : 4
- HPA Output Power = 45 dBm/Carrier
- BTS Output Power = 43 dBm/Carrier
- BTS Sensitivity = -108 dBm

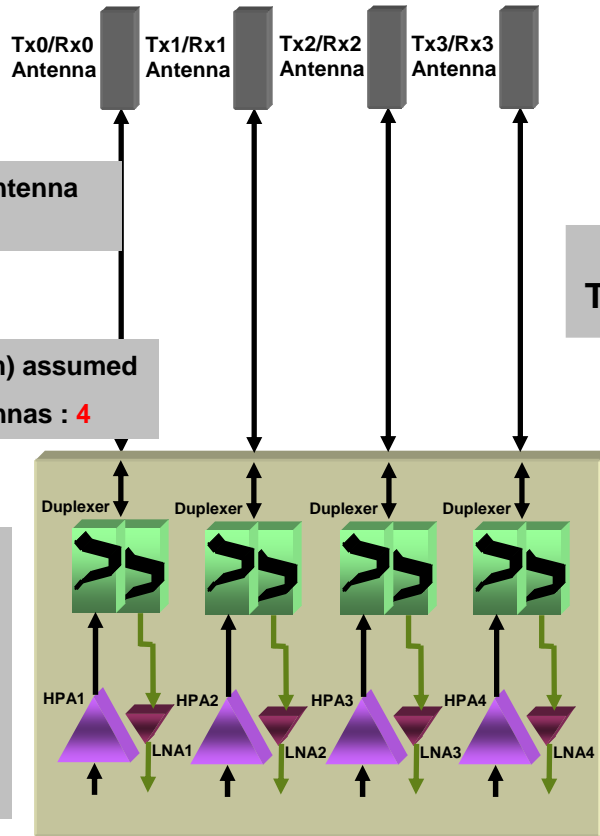

BTS

- ### Benefits
- ❖ Tx Power : 40 dBm ⇒ 44 dBm / Carrier
  - ❖ BTS Sensitivity : -108 dBm ⇒ -111 dBm
  - ❖ No need for additional antenna installation when increasing no. of carriers from 2 to 4

## Service Configuration with TM-MCPA

Install TM-MCPA



- Tx Power before Antenna = 44 dBm/Carrier
- Cable Loss : 3 dB (100m) assumed
- No. of Cables and Antennas : 2
- HPA Output Power = 45 dBm/Carrier
- BTS Output Power = 40 dBm/Carrier
- BTS Sensitivity = -111 dBm

BTS




# Application - 4 Carrier BTS (Case 2)

## Service Configuration without TM-MCPA

### Benefits

- ❖ Tx Power : 37 dBm ⇒ 44 dBm / Carrier
- ❖ BTS Sensitivity : -105 dBm ⇒ -111 dBm
- ❖ Avoid coverage reduction when increasing no. of carriers from 2 to 4

## Service Configuration with TM-MCPA

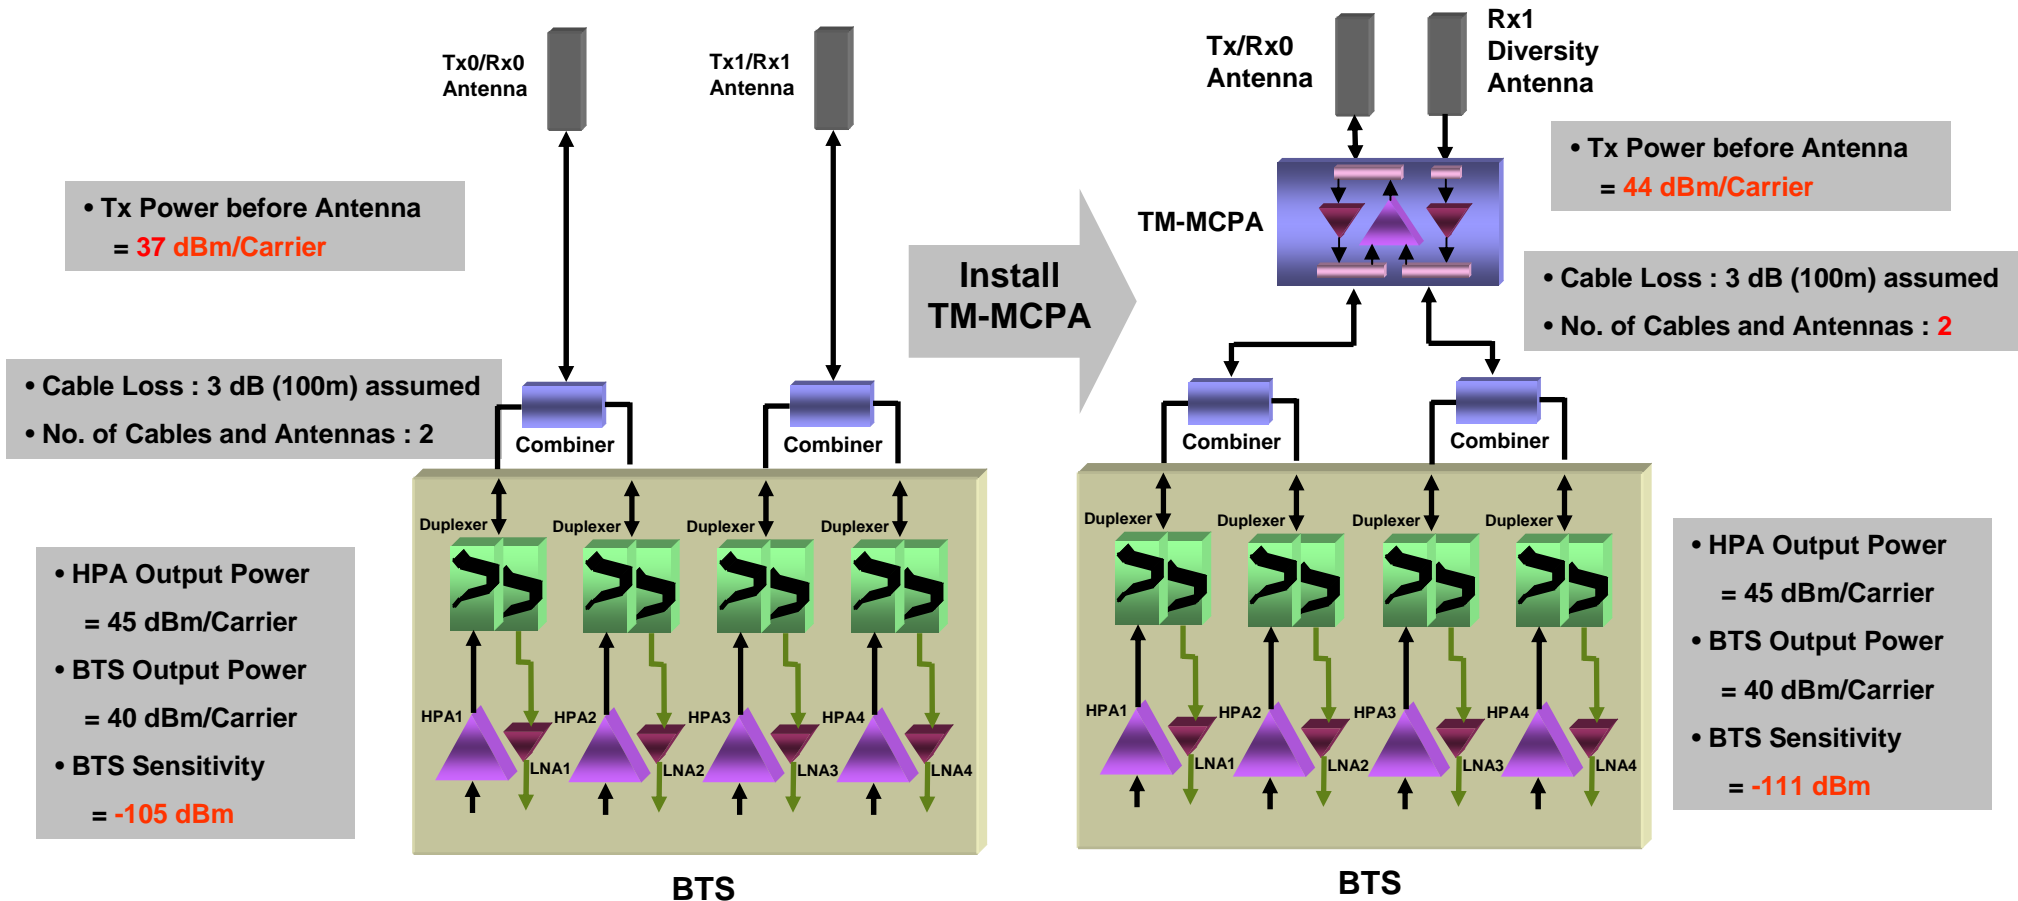




# Application - 6 Carrier BTS (Case 1)

## Service Configuration without TM-MCPA

## Benefits

- ❖ Tx Power : 40 dBm  $\Rightarrow$  42 dBm / Carrier
- ❖ BTS Sensitivity : -108 dBm  $\Rightarrow$  -111 dBm
- ❖ Avoid coverage reduction when increasing no. of carriers from 2 or 4 to 6.

## Service Configuration with TM-MCPA

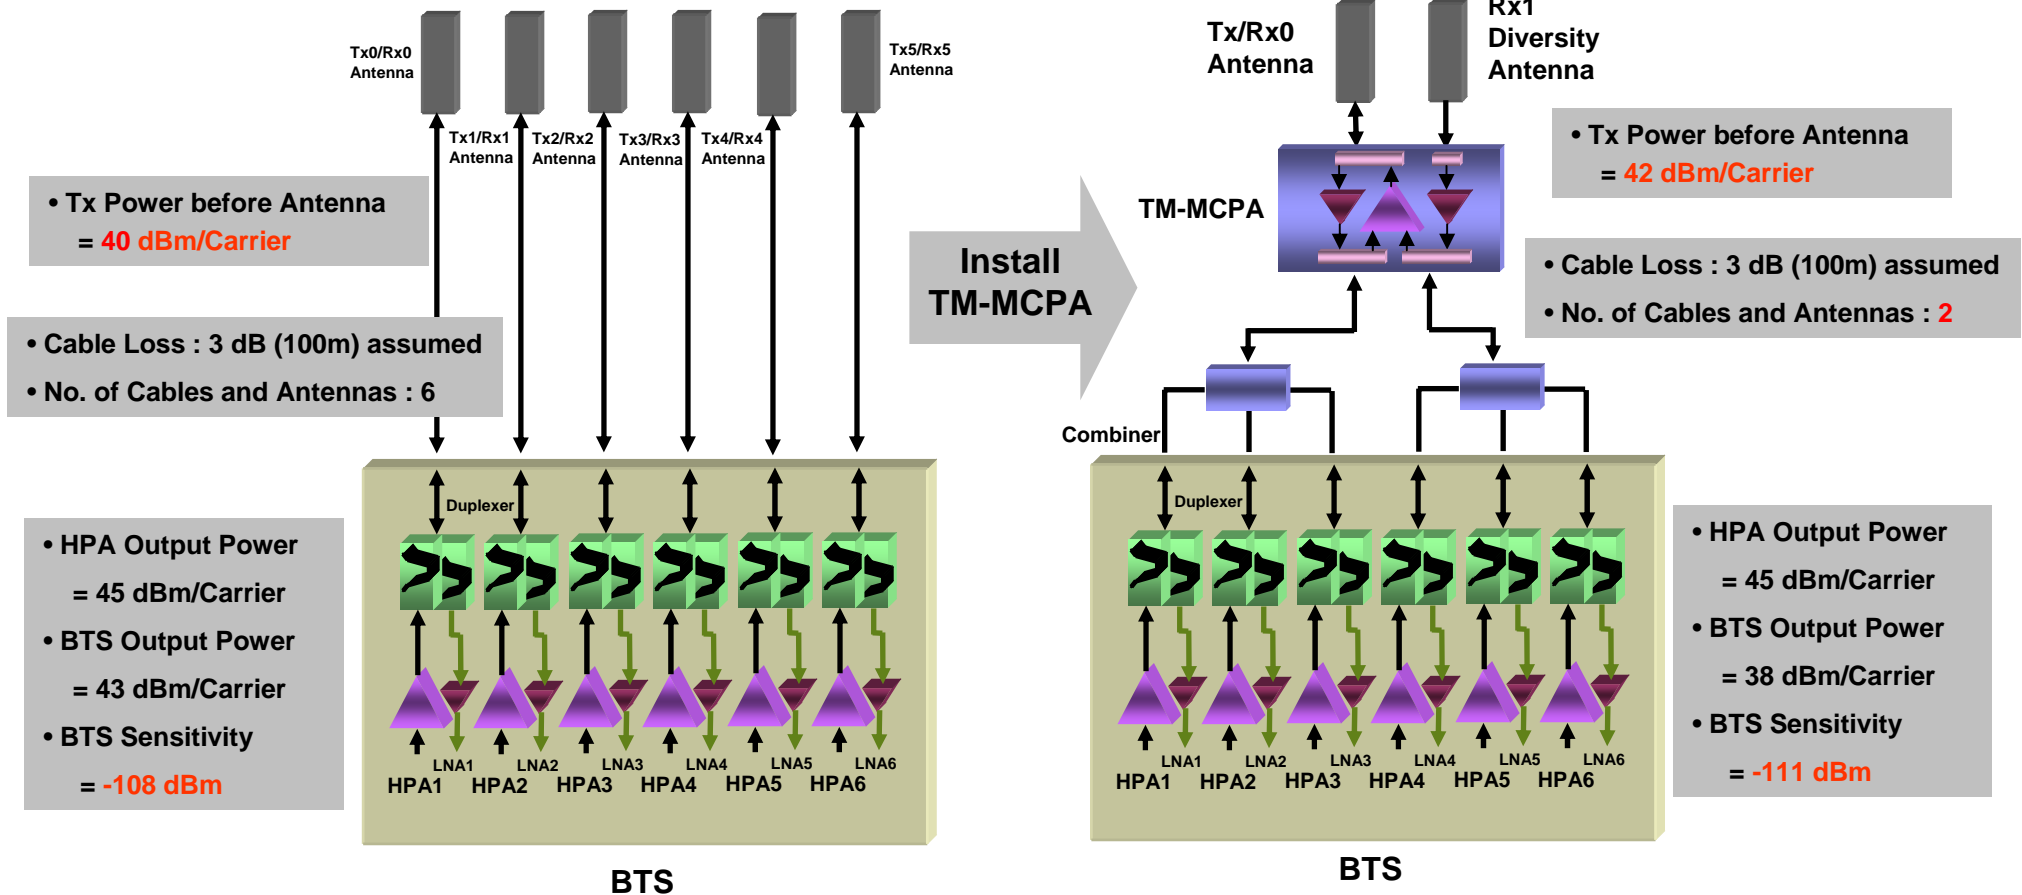




# Application - 6 Carrier BTS (Case 2)

## Service Configuration without TM-MCPA

- ### Benefits
- ❖ Tx Power : 35 dBm  $\Rightarrow$  42 dBm / Carrier
  - ❖ BTS Sensitivity : -107 dBm  $\Rightarrow$  -111 dBm
  - ❖ No need for additional antenna installation
  - ❖ Avoid coverage reduction


## Service Configuration with TM-MCPA

- Tx Power before Antenna = 35 dBm/Carrier
- Cable Loss : 3 dB (100m) assumed
- No. of Cables and Antennas : 2

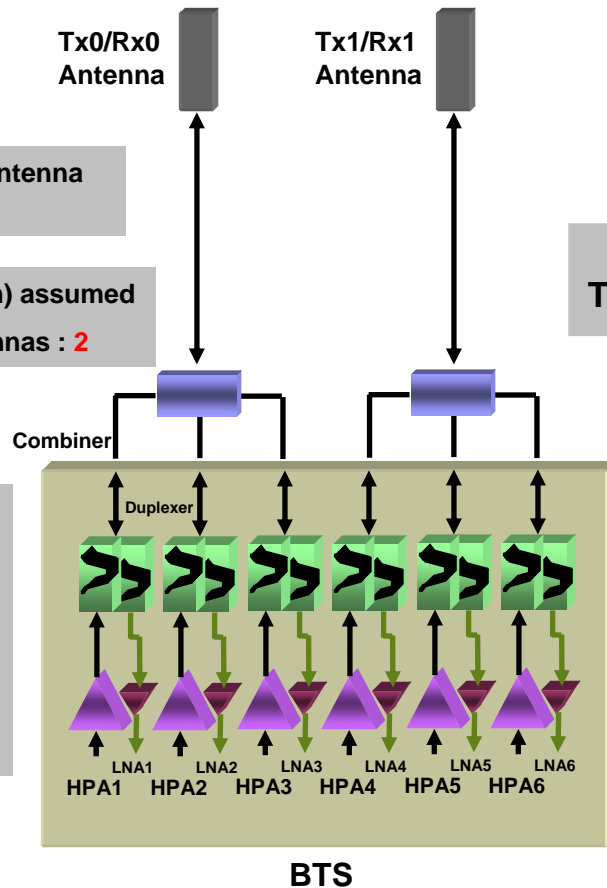

- HPA Output Power = 45 dBm/Carrier
- BTS Output Power = 38 dBm/Carrier
- BTS Sensitivity = -103 dBm

Install TM-MCPA

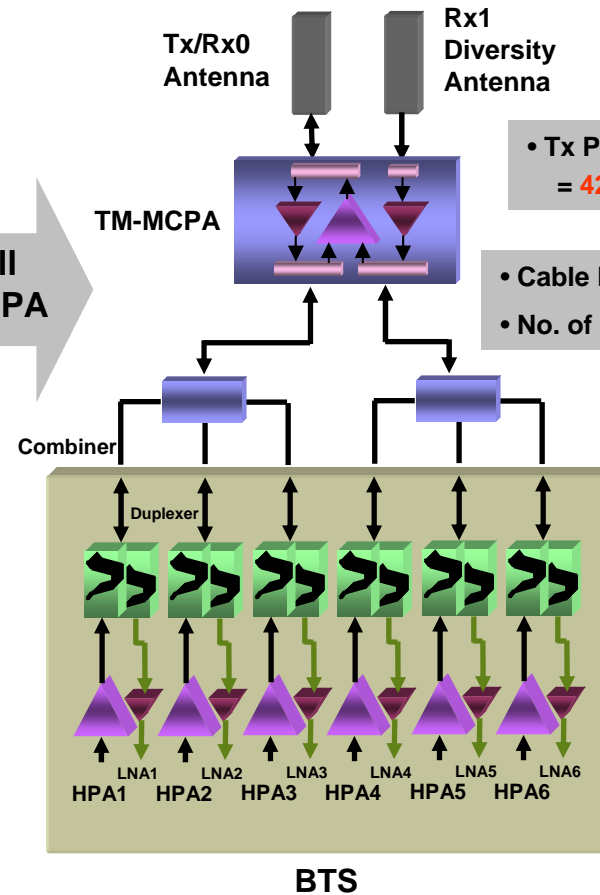


- Tx Power before Antenna = 42 dBm/Carrier
- Cable Loss : 3 dB (100m) assumed
- No. of Cables and Antennas : 2


- HPA Output Power = 45 dBm/Carrier
- BTS Output Power = 38 dBm/Carrier
- BTS Sensitivity = -111 dBm



# NMS Features

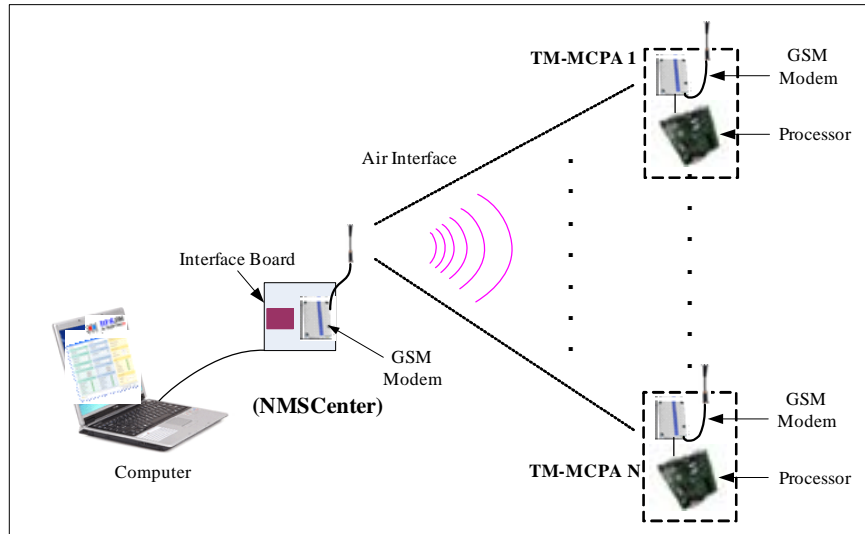

**NMS Configuration**

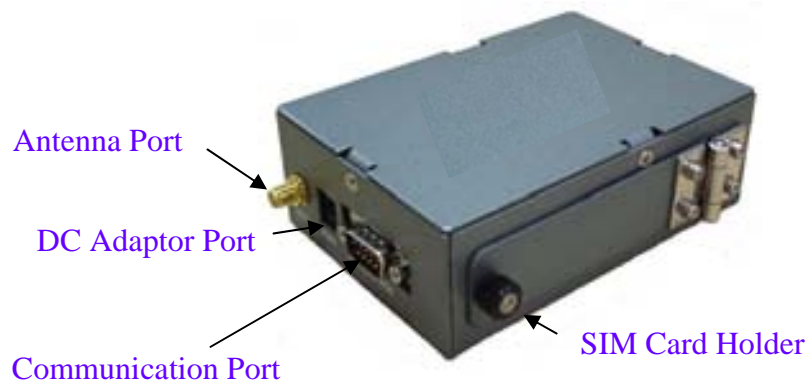

**NMS Modem Box**



**NMS Modem Box Components**

Thru NMS configuration allows operator to monitor and control alarms and parameters in NMS Center. Personal computer in NMS Center shall be installed with Emulation Program for accessing each TM-MCPA.

GSM Modem equipped in NMS Center and TM-MCPA sends SMS via air interface for 1:1 communication. In order to control or monitor each TM-MCPA from NMS Center, simply add repeater phone number into dialogue window provided in emulator program.

This NMS will be advantageous when managing both repeaters and MCPAs using one NMS screen.

## NMS Major Features

- Alarm Reporting to NMS Center
- Alarm Reporting to A/S Phone
- Monitor / Control
- Alarm History with Excel Format
- MCPA & Repeater Registration